

FITTING INSTRUCTIONS




PART NUMBER: **T2H468**

Holden VE & VF UTE S/SIDE not Maloo 2007 onwards

Towing Capacity 1250 Kg / Ball Load 125 Kg

Lug # L224c

- 1) Remove 3x 7mm bolts in wheel arch on each side, 1x Phillips head screw on each side at top of wheel arch and 2 scrivets on each side.
- 2) Remove 4 scrivets from under rear bumper and then remove.
- 3) Do the cut out on the bumper as per cut out template on the bumper plus 40mm at the bottom.

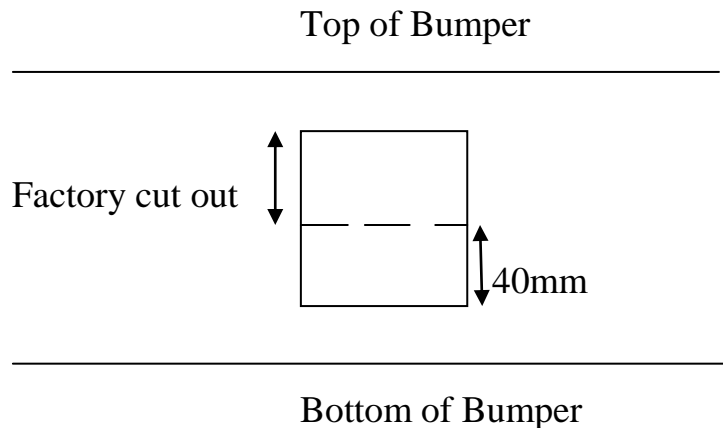

- 4) Lower exhaust for all models. Release 2x 14mm bolts on each side.
- 5) Put towbar in place and fit with bolts supplied - 2x19mm bolts at back, 1x 19mm bolt on both sides and a 19mm bolt & plate on wire.
- 6) Tighten all bolts to torque settings below.
- 7) Refit exhaust.
- 8) Refit bumper.
- 9) Fit tongue with bolts supplied.
- 10) Fit door stickers supplied to door.

FITTING INSTRUCTIONS

PART NUMBER: T2H468



**ECU MUST BE FITTED WITH THIS TOW BAR
ECU SOLD SEPARATELY**

RECOMMENDED ASSEMBLY

TORQUE LISTING

<u>Diameter</u>	<u>Grade 8.8 Bolt</u>
M6	Nm 9.5
M8	21.7
M10	43.4
M12	77.3
M16	189.8